



# TACT SWITCH

P/N:TSW06111-003E



Professional Manufacturer Since 2000

## SPECIFICATIONS

Function: Momentary action  
 Contact Arrangement: SPST, Normally Open  
 Termination: THD version

### Mechanical

Actuation Force: 230±50grams  
 Life Expectancy: 300,000 Operations

### Electrical

Contact Rating: 50mA . 12V DC  
 Dielectric Strength: 250V AC for 1 Min.  
 Contact Resistance: 100mΩ Max.  
 Insulation Resistance: 100MΩ Min.  
 Travel: 0.25±0.1mm

### Environmental



Operating Temperature: -40~+80℃  
 Relative Humidity: (40℃)≤95%RH

### Materials


8.Cap: White GP.PC  
 7.Cover: Black GP.PA66  
 6.Stem: Black GP.PC  
 5.Washer: Rubber  
 4.Waterproof membrane: PIF membrane  
 3.Contact: Stainless Steel with Silver Cladding  
 2.Holder: Black GP.PA66  
 1.Terminal: Copper with Silver Cladding

### Packaging




Bulk Package  
 Inner Package: Plastic bag  
 Outer Package: Carton

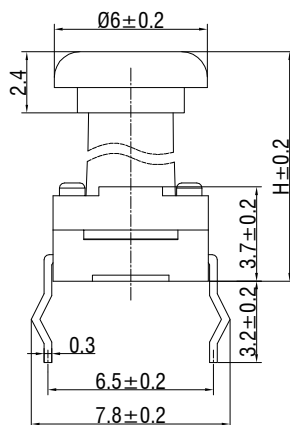

### CIRCUIT DIAGRAM



### P.C.B. LAYOUT

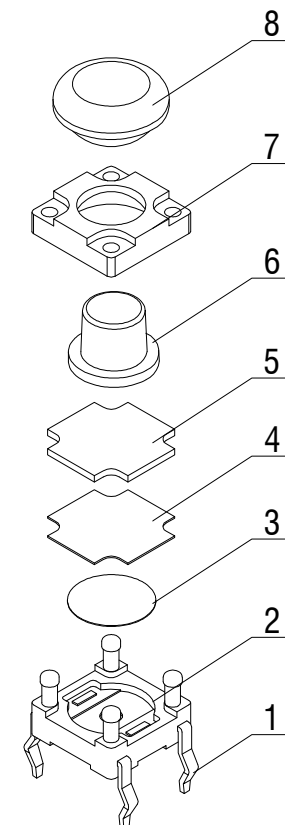

H	7.5	8	8.5	9	9.5	10	10.5	11	11.5	11.7	12	12.5
H	13	13.5	14	14.5	15	15.5	15.7	16	16.5	17	17.5	18
H	18.2	18.5	19	19.5	19.7	20	20.2	20.5	20.7	21	21.2	21.7
H	22	22.5	23	23.5	23.7	24	24.5	25	25.5	25.7	26	27
H	27.2	27.9	28	28.2	28.4	29	30	31	32			




# WENZHOU KHAN ELECTRONIC

### VERSION

KH14FE22E

### PROJECTION



Dimensions are shown:mm(inches)

DESIGNED

Wei Lin

CHECKED

ZhongJu Peng

APPROVED

Johan Xu

SCALE

4:1

SIZE

A4

2022.05.11